



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems

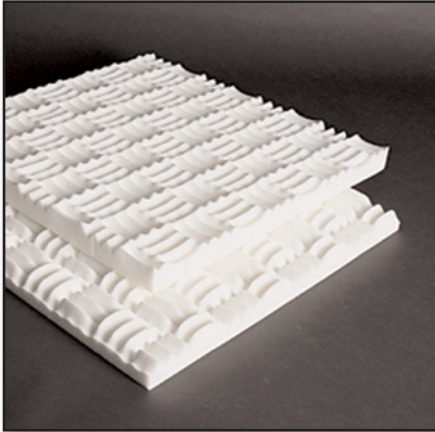

SONEX Classic™

Melamine Foam Acoustical Panels

- **Fiber Free**
- **Original Sculptured Foam Absorber**
- **High Acoustical Performance**
- **Class A Fire Retardant**

SONEX Classic™ are melamine foam acoustical panels that provide excellent sound and noise control where it's needed the most. Acoustical foam panels that are trusted by professional sound studios everywhere.

MATERIAL: Melamine Acoustical Foam.

PATTERN: Original sculptured surface. Modified anechoic design.

FEATURES: Increased absorption surface area.

APPLICATIONS: Industrial facilities, churches, multipurpose rooms, recording studios or other spaces that require acoustical control.

THICKNESS: 2" **SIZES:** 2' x 4' **DENSITY:** 0.7 lbs/cub. ft.

STANDARD COLORS: White, Grey, Charcoal. **OPTIONAL HPC-COATED COLORS:** Black, Light Grey, White, Almond, Medium Grey, Light Blue, Ivory. **CUSTOM COLORS:** *Please contact us to discuss custom color options.*

SMOKE SPREAD PER ASTM E84: Class A. Natural: 5; Painted: 10; HPC-Coated: 5; Colortec: 10

SMOKE DENSITY PER ASTM E84: Class A. Natural: 50; Painted: 10; HPC-Coated: 90; Colortec: 10.

INSTALLATION: ASI S.T.O.P. Noise Acoustical Adhesive.

Absorption Coefficients							
TYPE MTG	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
2" Natural A	0.05	0.31	0.81	1.01	0.99	0.95	0.80
2" Painted B	0.17	0.33	0.85	1.03	1.08	1.06	0.80
2" Colortec B	0.05	0.31	0.81	0.96	0.97	0.97	0.75

